


Modifications to Universal Voltronics XRC-60-60N Power Supply to Add Analog Controls

Note: This symbol indicates one end of resistor lifted from solder pad.

Note: Pins 13, 18, and 32 on J2 connector previously used as Safe Loop 1, 2, and 3 indicators were repurposed for analog control. Digital lines freed by disabling DAC's were not used because doing so required removal of resistor network chips. Lifting single resistors was easier and more readily reversible.

9130009-013 PWA Customer Interface

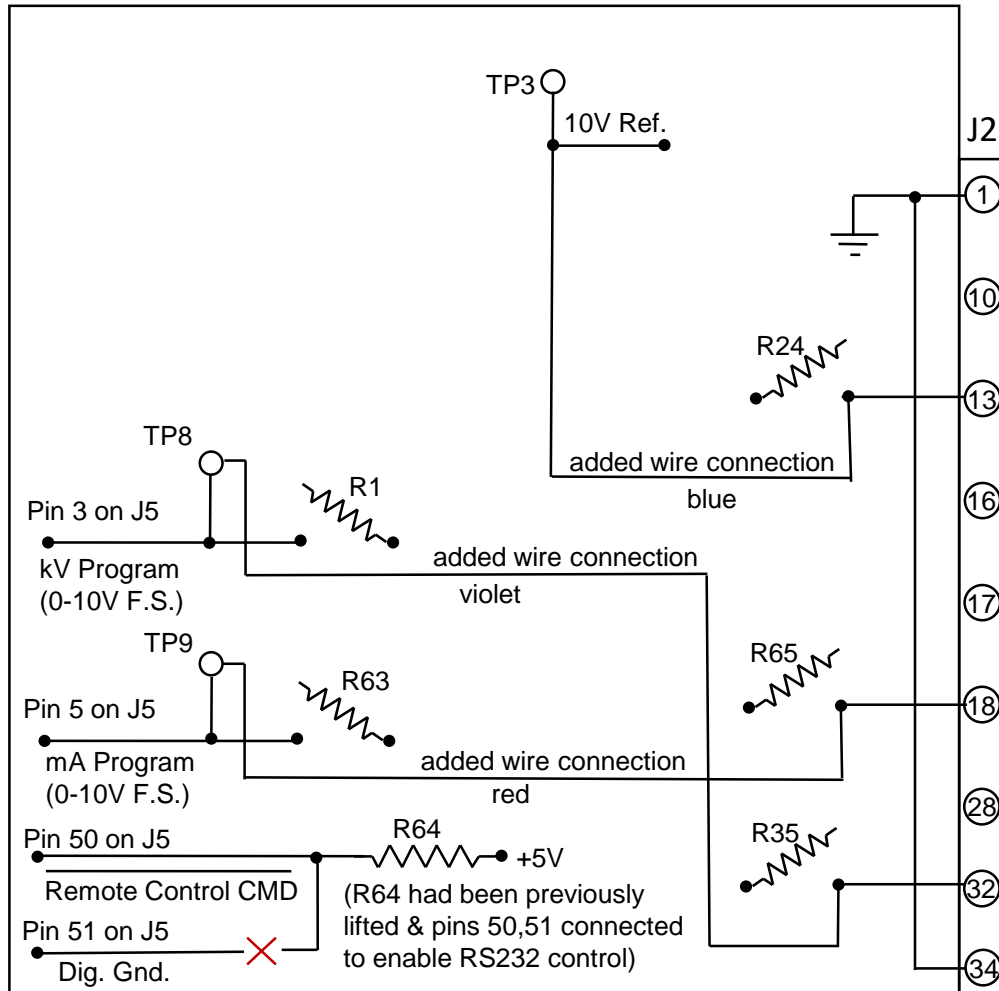

XRC-60-60N Analog Controller Box

